


10 pos (50 mil pitch) connector

20 pos (100 mil pitch) connector

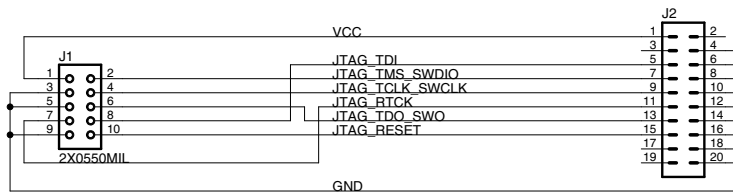

ARM 10-pin interface Serial Wire Mode

ARM 20-pin interface Serial Wire Mode

- 1-VCC
- 2-SWDIO
- 3-GND
- 4-SWCLK
- 5-GND
- 6-SWO
- 7-N/U
- 8-N/U
- 9-GND
- 10-RESET

- 1-VCC (Vtref)
- 2-N/C
- 3-N/U
- 4-GND
- 5-N/U
- 6-GND
- 7-SWDIO
- 8-GND
- 9-SWCLK
- 10-GND
- 11-N/U
- 12-GND
- 13-SWO
- 14-GND
- 15-RESET
- 16-GND
- 17-N/C
- 18-GND
- 19-N/C
- 20-GND

ARM 10-pin interface JTAG Mode

ARM 20-pin interface JTAG Mode

- 1-VCC
- 2-TMS
- 3-GND
- 4-TCLK
- 5-GND
- 6-TDO
- 7-RTCK
- 8-TDI
- 9-GND
- 10-RESET

- 1-VCC (Vtref)
- 2-N/C
- 3-N/C (TRST)
- 4-GND
- 5-TDI
- 6-GND
- 7-TMS
- 8-GND
- 9-TCLK
- 10-GND
- 11-RTCK
- 12-GND
- 13-TDO
- 14-GND
- 15-RESET
- 16-GND
- 17-N/C
- 18-GND
- 19-N/C
- 20-GND



(C) Embedded Artists AB

TITLE: 10-to-20 pos JTAG adapter rev A

Document Number:

REV:

Date: 2010-01-12 11:47:45

Sheet: 1/1